

H811-06-06-04-S


H811-06-06-04-S 03/14/2025 9:25 AM



American Engineering Trusted Wordwide<sup>®</sup>

## **Product Category**

**Part Description** 

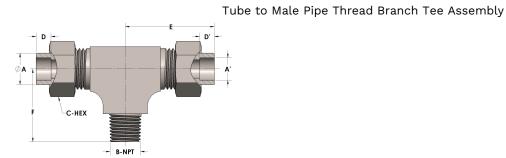

## DIMENSIONS

Α	0.380
Α'	0.380
B-NPT	1/4" - 18
C-HEX	0.81
D	0.250
D'	0.250
E	1.50
F	1.06

## **GENERAL**

Pressure Rating	4500 PSI
Assembly Material	Carbon Steel, ASTM A108
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	3/8" Tube O.D. (-06)
Connection 2 Type	Female Tube Socket
Connection 2 Size	3/8" Tube O.D. (-06)

## https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.