


## DATA SHEET

H812-10-08-10-S

H812-10-08-10-S 03/14/2025 9:25 AM

### **Product Category**

Part Description

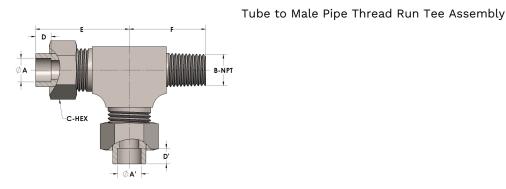

## DIMENSIONS

| A     | 0.630     |
|-------|-----------|
| A'    | 0.630     |
| B-NPT | 1/2" - 14 |
| C-HEX | 1.13      |
| D     | 0.380     |
| D'    | 0.380     |
| E     | 2.06      |
| F     | 1.44      |

# GENERAL

| Pressure Rating   | 3000 PSI                                           |
|-------------------|----------------------------------------------------|
| Assembly Material | Carbon Steel, ASTM A108                            |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 5/8" Tube O.D. (-10)                               |
| Connection 3 Type | Female Tube Socket                                 |
| Connection 3 Size | 5/8" Tube O.D. (-10)                               |

#### https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.