

American Engineering Trusted Wordwide


H813-20-20-16-SS316L 12/26/2024 6:32 PM

H813-20-20-16-SS316L



## **Product Category**

**Part Description** 

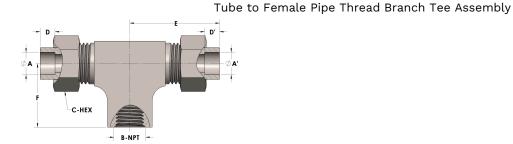

## **DIMENSIONS**

| A     | 1.250         |
|-------|---------------|
| Α'    | 1.250         |
| B-NPT | 1.000" - 11.5 |
| C-HEX | 2             |
| D     | 0.560         |
| D'    | 0.560         |
| E     | 3.06          |
| F     | 2.19          |

## **GENERAL**

| Pressure Rating   | 3000 PSI   |
|-------------------|--|
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 1.25" Tube O.D. (-20)                              |
| Connection 2 Type | Female Tube Socket                                 |
| Connection 2 Size | 1.25" Tube O.D. (-20)                              |

## https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.