#### DATA SHEET

H815-16-16-SS316L


H815-16-16-16-SS316L 01/13/2025 12:31 PM



American Engineering Trusted Wordwide

### **Product Category**

**Part Description** 

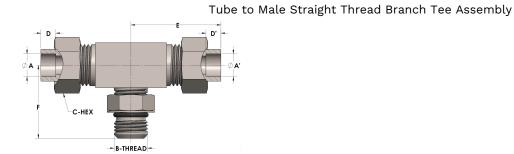

## DIMENSIONS

Α	1.000
A'	1.000
B-THREAD	1.313" - 12UN
C-HEX	1.63
D	0.500
D'	0.500
E	2.75
F	2.06

# **GENERAL**

Pressure Rating	4500 PSI
Assembly Material	316/L Stainless Steel, ASTM A276, UNS S31600/03
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	1" Tube O.D. (-16)
Connection 2 Type	Female Tube Socket
Connection 2 Size	1" Tube O.D. (-16)

#### https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.