


H816-04-04-04-M

H816-04-04-04-M 12/26/2024 8:10 PM

Product Category

Part Description

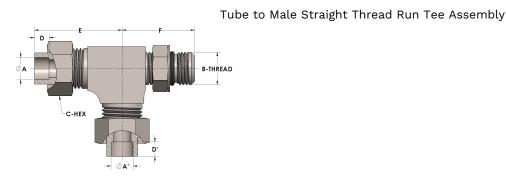

DIMENSIONS

| Α | 0.250 |
|----------|----------------|
| A' | 0.250 |
| B-THREAD | .438" - 20UINF |
| C-HEX | 0.63 |
| D | 0.190 |
| D' | 0.190 |
| E | 1.19 |
| F | 1.19 |

GENERAL

| Pressure Rating | 6000 PSI |
|----------------------|--|
| Tailpiece Material | Monel®, ASTM B164, UNS N04405 |
| Threadpiece Material | Monel®, ASTM B564, UNS N04400 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 1/40 Tube O.D. (-04) |
| Connection 3 Type | Female Tube Socket |
| Connection 3 Size | 1/40 Tube O.D. (-04) |

https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.