


Product Category

H816-10-10-10-SS316L

Part Description

Tube to Male Straight Thread Run Tee Assembly

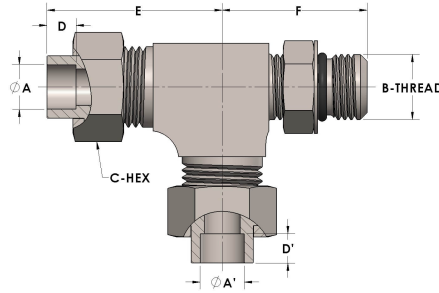

## DIMENSIONS

|          |               |
|----------|---------------|
| A        | 0.630         |
| A'       | 0.630         |
| B-THREAD | .875" - 14UNF |
| C-HEX    | 1.13          |
| D        | 0.380         |
| D'       | 0.380         |
| E        | 2.06          |
| F        | 1.69          |

## GENERAL

|                   |  |
|-------------------|--|
| Pressure Rating   | 4500 PSI   |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 5/8" Tube O.D. (-10)                               |
| Connection 3 Type | Female Tube Socket                                 |
| Connection 3 Size | 5/8" Tube O.D. (-10)                               |