


H816-12-12-S

H816-12-12-12-S 02/05/2025 2:54 AM

Product Category

Part Description

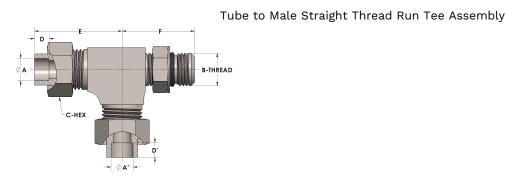

DIMENSIONS

Α	0.750
Α'	0.750
B-THREAD	1.063" - 12UN
C-HEX	1.38
D	0.440
D'	0.440
E	2.25
F	1.94

GENERAL

Pressure Rating	4500 PSI
Assembly Material	Carbon Steel, ASTM A108
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	3/4" Tube O.D. (-12)
Connection 3 Type	Female Tube Socket
Connection 3 Size	3/4" Tube O.D. (-12)

https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.